





KUBINEC STRAPPING SOLUTIONS^{INC.}


Step 1: Position the tail (the portion coming off the bottom of the buckle) through the large center area of the tool. Pull the EZ Strap under the blade of the tool and back towards you

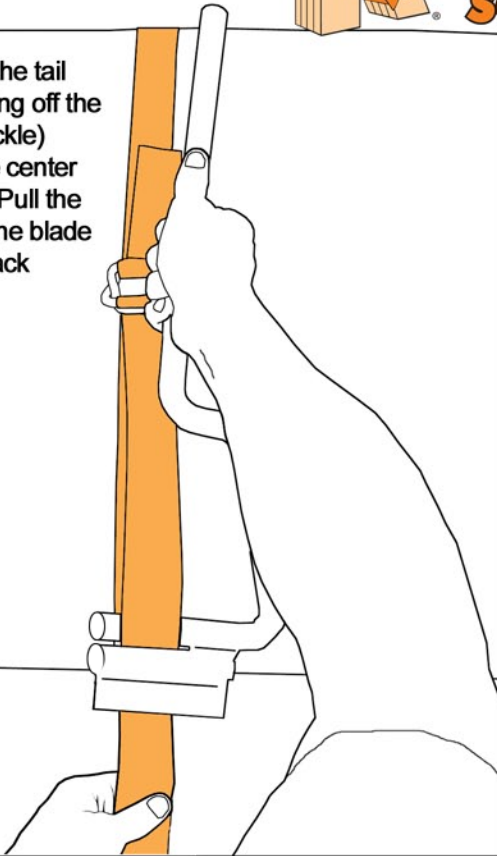

Step 2: Rest the blade of the tool against an edge on the load and pull the handle towards you to apply tension to the EZ Strap.

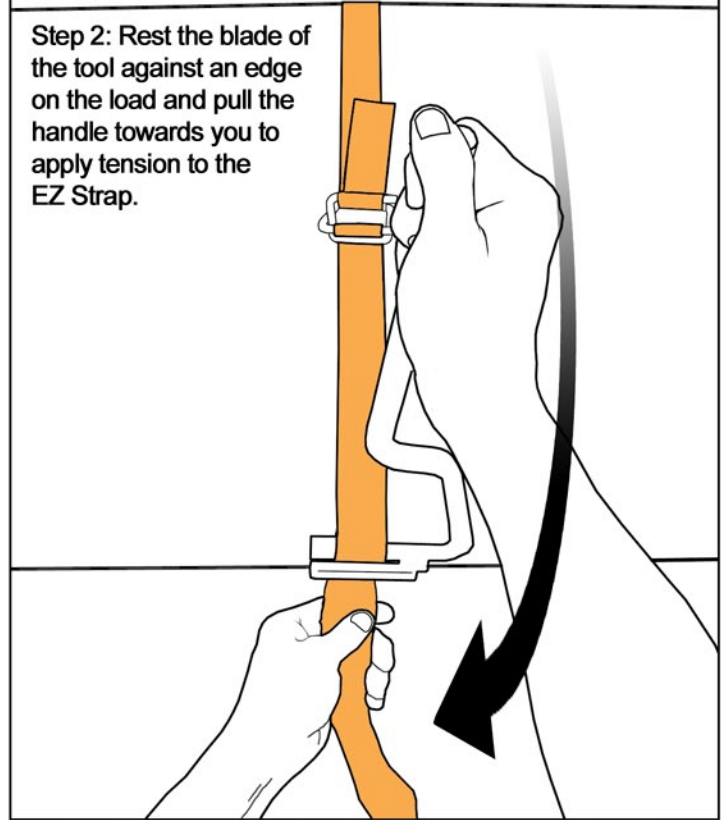

Step 3: Pull the slack out of the EZ Strap and repeat steps 1 & 2.

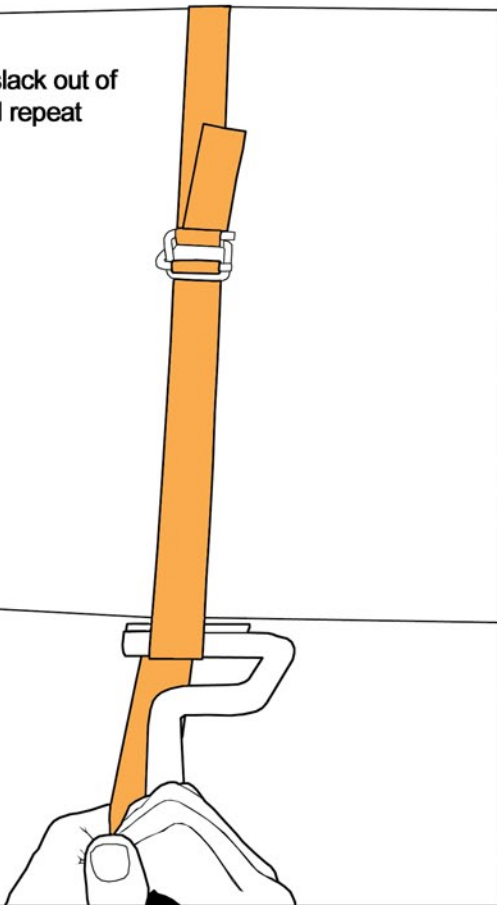

Step 4: Pull until you reach desired tension.

